











# europex

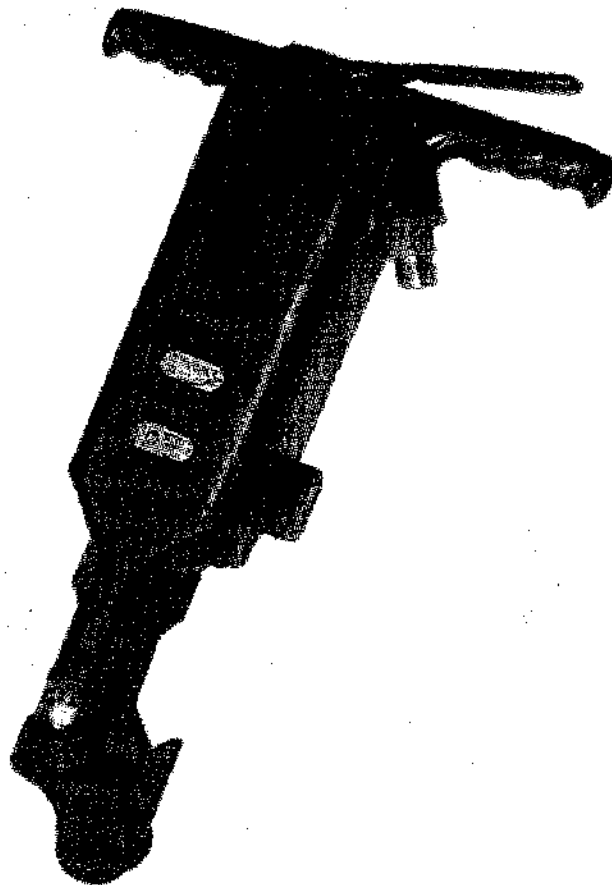


*Pneumatic breaker*



**DPS.220 - DPS.230 - DPS.250**


**CE**

	 Kg	 mm	 l/s	 mm	 mm	 mm	 Nr.
DPS.220	21	655	24	115	48	19	1.500
DPS.230	24	705	24	115	48	19	1.500
DPS.250	25,6	720	26	125	54	19	1.300

			DPS.220	DPS.230	DPS.250
E.25	•		05400233	-----	-----
E.28	•		-----	05400231	05400251
E.32	•		-----	05400232	05400252

## Technical characteristics

### Mechanical characteristics

Type	DPS.220 DPS.230 DPS.250	
Code	035400233 03540023X 03540025X	
Silencer	Si - Yes Oui - Ja	
Ø Bore and stroke in mm	45 x 115 45 x 115 54 x 115	
Retainer	Si - Yes Oui - Ja	
Shank bush	E.25 E.28 - E.32 E.28 - E.32	
Air inlet thread	3/4" gas	
Ø int. of air hose in mm	19	
Weight in daN	21 24 25,6	

### Physical characteristics

Type	DPS.220 DPS.230 DPS.250	
Sound pressure level - Lp dB(A) - EEC 98/37	91 92 89	
Noise power level - Lwa dB(A) - EEC 2000/14	107 108 108	
Vibration level - Aeq m/sec <sup>2</sup> - ISO 8662-5	7,5 - 8,5 7,5 - 8,5 7,5 - 8,5	
CE Mark	* 03	